

thermo scientific



Thermo Scientific Refrigerated Incubators Models RI-150, RI-250

A broad temperature range for your applications

ThermoFisher
SCIENTIFIC

From incubation and sample storage in life sciences to BOD (biochemical oxygen demand) testing in water treatment plants, the need for temperature precision is critical. Thermo Scientific™ Refrigerated Incubators, designed to fit your budget, are quality products with features that provide precision and produce consistent results – bringing basics to a new level.

When refrigerated incubators are essential to your application, consider Thermo Scientific Refrigerated Incubators Models RI-150, RI-250.

With a temperature range of 4-60 °C, our refrigerated incubators are equipped to reach the precise application temperatures you need for reproducible results. Our Model RI-150 and RI-250 refrigerated incubators are available in a bench top or a spacious floor model.




Model RI-150
bench top unit



Model RI-250
floor model

Application examples

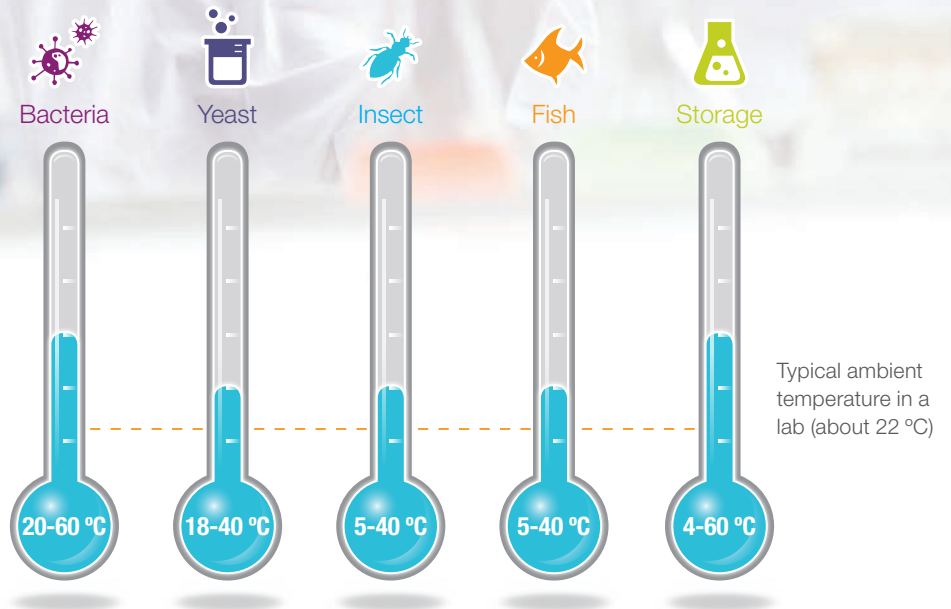

Thermo Scientific refrigerated incubators provide optimal temperature environments for applications that require stable temperatures above or below ambient, including incubation of bacteria, yeast, insects or fish, and temperature storage. They are also optimal for standard 30 to 37 °C incubation applications in warm environments.

Thermo Scientific Refrigerated Incubators

Thermo Scientific refrigerated incubators offer an array of features and add-on accessories designed to provide users with ease-of-use and protection for valuable samples.

Features and benefits

Broad 5 to 60 °C temperature range for applications that require high or low temperature levels

Adjustable over and under temperature alarm alerts operator of unexpected temperature deviations

Single-setpoint microprocessor control for precise temperature setting

Simple calibration routine for accurate temperature display

RS232 data interface for temperature monitoring (no software included)

Automatic defrost for uninterrupted longterm applications below ambient

Technically mature, reliable compressor technology

Timer function for automatic start or shut down of unit (0 to 99:59 hours:minutes)

Access port (Ø 50 mm) for inserting monitoring probes or cables for use of electrical devices – easy access on right side of unit

Large unit with lockable casters for easy set-up and re-location

Overtemperature cut-out and fan motor overheating protection for additional safety

Glass window in door for undisturbed inspection of samples

Shelving system provides sample flexibility with 34-66 shelf positions

Access port (Ø 50 mm) for inserting monitoring probes or cables for use of electrical devices – easy access on right side of unit

IQ/OQ documentation and services available

Quiet long shaft fan and unique airflow ensure great temperature distribution

Inset images: Top left shows an RS232 interface and a 230V-50Hz power plug. Top right shows a close-up of the digital control panel displaying 20.05. Bottom left shows the unit on casters. Bottom right shows the interior shelving system with sample containers.



Product specification and ordering information

Model	RI-150 (Bench top)	RI-250 (Floor model)
Order Number	RI-150EU	RI-250EU
Chamber Volume	150 L / 5.3 cu ft	250 L / 8.8 cu ft
Temperature Range	+4 to 60 °C	
Temperature Deviation Over Time*	At 20 °C: ≤ ±0.3, at 37 °C: ≤ ±0.3	
Spatial Temperature Deviation*	At 20 °C: ≤ ±0.8, at 37 °C: ≤ ±0.7	At 20 °C: ≤ ±0.8, at 37 °C: ≤ ±1.0
Internal Dimensions (W x D x H)	550 x 450 x 615 mm / 21.6 x 17.7 x 24.2 in.	550 x 450 x 1015 mm / 21.6 x 17.7 x 40.0 in.
External Dimensions (W x D x H)**	652 x 605 x 1050** mm / 25.7 x 23.8 x 41.3** in.	652 x 605 x 1450** mm / 25.7 x 23.8 x 57.1** in.
Footprint	0.39 m ² / 4.2 ft ²	
Shelves Supplied / Max	2 / 4	3 / 5
Shelf Size (W x D)	545 x 445 mm / 21.46 x 17.52 in.	
Loading Capacity Per Shelf	15 kg / 33 lbs	
Weight Of Unit	95 kg / 209 lbs	115 kg / 254 lbs
Shipping Weight	115 kg / 254 lbs	135 kg / 298 lbs
Electrical	230 V / 50 Hz, EU Schuko plug, UK plug, Australia plug included	
Rated Power / Max. Current	1150 W / 5.0 A	
Refrigerant***	R134a, 0.32 kg	R134a, 0.35 kg
	GWP : 1420	
	CO ₂ e : 0.45 t	CO ₂ e : 0.50 t


* Based on measurement according to DIN12880, at ambient temperature of 22 °C ±3 °C

** Height includes the height of feet/casters

*** This device complies with EU-F-Gas Regulation No. 517/2014 and contains fluorinated greenhouse gases in a hermetically sealed system

Accessories

Shelving	
Order Number	RISHelf
Description	Perforated stainless steel shelf (white, powder coated) with 4 shelf holders
Dimensions	545 x 445 mm / 21.46 x 17.52 in.
Shipping Weight	2 kg / 4 lbs
For Use With	RI-150EU, RI-250EU



White stainless steel perforated shelf



Shelf holders included

CE RoHS, RoHS China

The products are CE certified, and comply with RoHS guidelines.

Find out more at thermofisher.com/refrigeratedincubators

© 2017 Thermo Fisher Scientific Inc. All rights reserved. Viton is a registered trademark of DuPont Performance Elastomers L.L.C. All other trademarks are the property of Thermo Fisher Scientific Inc. and its subsidiaries. Specifications, terms and pricing are subject to change. Not all products are available in all countries. Please consult your local sales representative for details.

Australia +61 39757 4300

Austria +43 1 801 40 0

Belgium +32 9 272 54 82

China +800 810 5118 or

+400 650 5118

France +33 2 2803 2180

Germany national toll free 0800 1 536 376

Germany international +49 6184 90 6321

India toll free 1800 22 8374

India +91 22 6716 2200

Italy +39 02 95059 552

Japan +81 3 5826 1616

Netherlands +31 76 579 55 55

New Zealand +64 9 980 6700

Nordic/Baltic/CIS countries

+358 10 329 2200

Russia +7 812 703 42 15

Spain/Portugal +34 93 223 09 18

Switzerland +41 44 454 12 12

UK/Ireland +44 870 609 9203

USA/Canada +1 866 984 3766

Other Asian countries +852 3107 7600

Countries not listed +49 6184 90 6000

BRREFINCEU0217

ThermoFisher
SCIENTIFIC